

freezers

Ice Cream | Chest | Upright






ICE CREAM

impulse freezers

Ice cream freezers are offered in 6 different sizes with a diversity of lids. All models are are very well suited for branding. Illuminated display board can be supplied as factory order, and baskets are supplied for all models as standard.

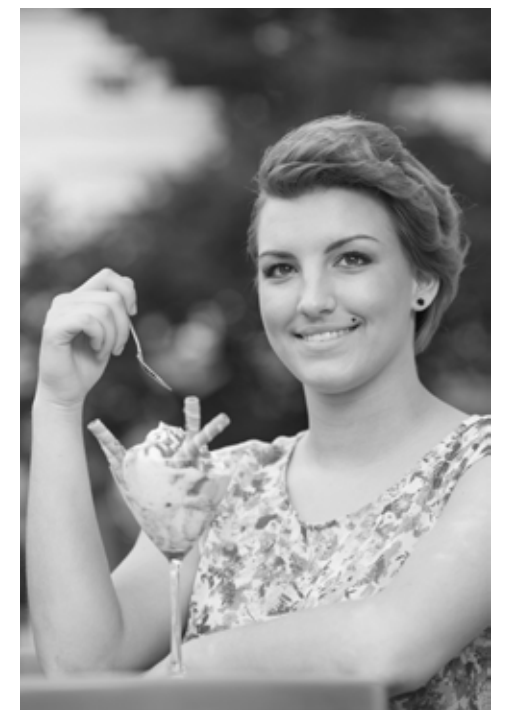

Did you know?

You can find the new NIC-range on pages 112-115.

» Ice Cream Freezers



NIC100CP

- Curved sliding lid
- Thermometer
- Powder coated inner liner
- 4 castors included
- Illuminated display board
- Options:
- Customized decoration
- Dividers



Vertically sliding lid NIC 100



Option: Dividers



Option: Illuminated display board



NIC200SCEB

- Curved sliding lids
- Thermometer
- Powder coated inner liner
- 4 castors included
- Options:
- Customized decoration
- Illuminated display board
- Dividers



NIC300SCEB

- Curved sliding lids
- Thermometer
- Powder coated inner liner
- 4 castors included
- Options:
- Customized decoration
- Illuminated display board
- Dividers

Technical specifications

Model	NIC100	NIC200SCEB	NIC300SCEB	NIC400SCEB	NIC500SCEB
Climate Class	N-T	N-T	N-T	N-T	N-T
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	130	185	286	388	475
Net Volume, l	115	138	218	298	367
External Dimensions, WxDxH(with wheels)	665x665x918	740x650x918	1030x650x918	1320x650x918	1570x650x918
Internal Dimensions, WxDxH	510x510x571	600x510x571	890x510x571	1180x510x571	1430x510x571
Doors	1 curved sliding glass	2 curved sliding glass	2 curved sliding glass	2 curved sliding glass	2 curved sliding glass
Shelves/Baskets	-	1	1	2	2
Outer Body	White	White	White	White	White
Interior	White	White	White	White	White
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	N	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	120	200	220	300	400
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	50	63	70	87	122
Net Weight, kg	47	52	62	72	110
Noise Level dbA	45	45	45	45	45
Type of Cooling	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R404a	R404a	R404a	R404a	R404a
Charge, g	135	110	145	155	165
Internal Light	N	N	N	N	N
Option: Charged with R290					

» Ice Cream Freezers



NIC200SC

- Flat sliding lids with lock
- Thermometer
- Powder coated inner liner
- 1 basket included
- 4 castors included
- Options:
- Customized decoration
- Illuminated display board



Castors with and without brake



Various sizes of baskets available



Option: Illuminated display board



NIC300SC

- Flat sliding lids with lock
- Thermometer
- Powder coated inner liner
- 1 basket included
- 4 castors included
- Options:
- Customized decoration
- Illuminated display board



NIC400SC

- Flat sliding lids with lock
- Thermometer
- Powder coated inner liner
- 2 baskets included
- 4 castors included
- Options:
- Customized decoration
- Illuminated display board

Technical specifications

Model	NIC200SC	NIC300SC	NIC400SC	NIC500SC
Climate Class	N-T	N-T	N-T	N-T
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	186	326	440	539
Net Volume, l	138	245	334	410
External Dimensions, WxDxH(with wheels)	740x650x885	1030x650x885	1320x650x885	1570x650x885
Internal Dimensions, WxDxH	600x510x576	890x510x576	1180x510x576	1430x510x576
Doors	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass
Shelves/Baskets	1	1	2	2
Outer Body	White	White	White	White
Interior	White	White	White	White
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	200	220	300	400
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	63	70	87	122
Net Weight, kg	52	62	72	110
Noise Level dbA	45	45	45	45
Type of Cooling	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R404a	R404a	R404a	R404a
Charge, g	110	135	155	165
Internal Light	N	N	N	N
Option: Charged with R290				

» Ice Cream Freezers



- IC400SC
- Flat sliding lids with lock
 - Thermometer
 - Inner liner of stucco aluminium
 - 2 baskets included
 - 4 castors included
 - Options: Customized decoration
 - Illuminated display board



- IC200SC
- Flat sliding lids with lock
 - Thermometer
 - Inner liner of stucco aluminium
 - 1 baskets included
 - 4 castors included
 - Options: Customized decoration
 - Illuminated display board



- IC500SC
- Flat sliding lids with lock
 - Thermometer
 - Inner liner of stucco aluminium
 - 2 baskets included
 - 4 castors included
 - Options: Customized decoration
 - Illuminated display board

Technical specifications

Model	IC200SC	IC300SC	IC400SC	IC500SC	IC550SC	IC700SC
Climate Class	N-T	N-T	N-T	N-T	N-T	N-T
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	191	296	401	491	555	670
Net Volume, l	165	255	350	430	486	620
External Dimensions, WxDxH(with wheels)	720x630x798(892)	1010x630x798(892)	1300x630x798(892)	1550x630x798(892)	1750x630x798(892)	2055x630x798(892)
Internal Dimensions, WxDxH	600x510x655	890x510x655	1180x510x655	1430x510x655	1630x510x655	1930x510x655
Doors	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass
Shelves/Baskets	1 basket	1 basket	2 baskets	2 baskets	2 baskets	3 baskets
Outer Body	White	White	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	218	239	330	335	350	645
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	57	67	82	98	114	115
Net Weight, kg	52	62	77	93	96	100
Noise Level dbA	45	45	45	45	45	45
Type of Cooling	Static	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y	Y
Refrigerant	R404a	R404a	R404a	R404a	R404a	R404a
Charge, g	140	135	220	230	250	270
Internal Light	N	N	N	N	N	N
Option: Charged with R290						



Castors with and without brake



Various sizes of baskets available



Option: Illuminated display board

» Ice Cream Freezers



- IC300SCE**
- Angled sliding lids with lock
 - Thermometer
 - Inner liner of stucco aluminium
 - 1 basket included
 - 4 castors included
 - Options: Customized decoration
 - Illuminated display board



Castors with and without brake



Various sizes of baskets available



Option: Illuminated display board



- IC200SCE**
- Angled sliding lids with lock
 - Thermometer
 - Inner liner of stucco aluminium
 - 1 basket included
 - 4 castors included
 - Options: Customized decoration
 - Illuminated display board



- IC400SCE**
- Angled sliding lids with lock
 - Thermometer
 - Inner liner of stucco aluminium
 - 2 baskets included
 - 4 castors included
 - Options: Customized decoration
 - Illuminated display board

Technical specifications

Model	IC100SCE	IC200SCE	IC300SCE	IC400SCE	IC500SCE	IC550SCE
Climate Class	N-T	N-T	N-T	N-T	N-T	N-T
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	100	176	264	352	427	540
Net Volume, l	85	157	230	325	398	481
External Dimensions, WxDxH(with wheels)	570x570x680/800(885)	720x615x710/855(949)	1010x615x710/855(949)	1300x615x710/855(949)	1550x615x710/855(949)	1750x615x710/855(949)
Internal Dimensions, WxDxH	450x450x385/490	600x495x610/710	890x495x610/710	1180x495x610/710	1430x495x610/710	1630x495x610/710
Doors	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass
Shelves/Baskets	1 basket	1 basket	1 basket	2 baskets	2 baskets	2 baskets
Outer Body	White	White	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	129	218	239	330	335	335
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	40	58	65	76	82	114
Net Weight, kg	37	53	57	66	72	96
Noise Level dbA	45	45	45	45	45	45
Type of Cooling	Static	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y	Y
Refrigerant	R404a	R404a	R404a	R404a	R404a	R404a
Charge, g	110	165	165	230	250	250
Internal Light	N	N	N	N	N	N
Option: Charged with R290						

» Ice Cream Freezers



- IC400SCEB**
- Curved sliding lids with lock
 - Thermometer
 - Inner liner of stucco aluminium
 - 2 baskets included
 - 4 castors included
 - Options: Customized decoration
 - Illuminated display board



- IC200SCEB**
- Curved sliding lids with lock
 - Thermometer
 - Inner liner of stucco aluminium
 - 1 basket included
 - 4 castors included
 - Options: Customized decoration
 - Illuminated display board



- IC500SCEB**
- Curved sliding lids with lock
 - Thermometer
 - Inner liner of stucco aluminium
 - 2 baskets included
 - 4 castors included
 - Options: Customized decoration
 - Illuminated display board

Technical specifications

Model	IC100SCEB	IC200SCEB	IC300SCEB	IC400SCEB	IC500SCEB	IC550SCEB
Climate Class	N-T	N-T	N-T	N-T	N-T	N-T
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	100	176	264	352	427	540
Net Volume, l	85	157	230	325	398	481
External Dimensions, WxDxH(with wheels)	570x570x680/800(885)	720x615x710/855(949)	1010x615x710/855(949)	1300x615x710/855(949)	1550x615x710/855(949)	1750x615x710/855(949)
Internal Dimensions, WxDxH	450x450x385/490	600x495x610/710	890x495x610/710	1180x495x610/710	1430x495x610/710	1630x495x610/710
Doors	2 curved sliding glass	2 curved sliding glass	2 curved sliding glass	2 curved sliding glass	2 curved sliding glass	2 curved sliding glass
Shelves/Baskets	1 basket	1 basket	1 basket	2 baskets	2 baskets	2 baskets
Outer Body	White	White	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	129	218	239	330	335	335
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	40	58	65	76	82	114
Net Weight, kg	37	53	57	66	72	96
Noise Level dbA	45	45	45	45	45	45
Type of Cooling	Static	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y	Y
Refrigerant	R404a	R404a	R404a	R404a	R404a	R404a
Charge, g	110	110	165	220	230	250
Internal Light	N	N	N	N	N	N
Option: Charged with R290						



Castors with and without brake



Various sizes of baskets available



Option: Illuminated display board

» Ice Cream Freezers



ST160

- Flat hinged glass lid
- Inner liner of stucco aluminium
- 1 basket included
- 4 double castors included
- Options: Customized decoration
- Illuminated display board



ST400

- Flat hinged glass lid
- Thermometer
- Inner liner of stucco aluminium
- 1 basket included (As standard)
- 4 double castors included
- Options: Customized decoration
- Illuminated display board

Technical specifications

Model	ST160	ST200	ST300	ST400	ST500	ST700
Climate Class	N	N	N	N	N	N
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	115	174	296	401	491	670
Net Volume, l	105	160	255	350	430	620
External Dimensions, WxDxH	550x550x870	720x720x860	1010x720x860	1300x720x860	1550x720x860	2055x720x860
Internal Dimensions, WxDxH	435x435x755	600x510x655	890x510x655	1180x510x655	1430x510x655	1930x510x655
Doors	1 hinged glass lid	1 hinged glass lid	1 hinged glass lid	1 hinged glass lid	1 hinged glass lid	1 hinged glass lid
Shelves/Baskets	1 basket	1 basket	1 basket	1 basket	1 basket	1 basket
Outer Body	White	White	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	N	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	130	175	205	330	345	345
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	43	59	68	78	88	109
Net Weight, kg	35	51	58	69	78	103
Noise Level dbA	42	45	45	45	45	45
Type of Cooling	Static	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y	Y
Refrigerant	R134a	R404a	R404a	R404a	R404a	R404a
Charge, g	90	140	165	190	230	270
Internal Light	N	N	N	N	N	N
Option: Charged with R290						

» Ice Cream Freezers



DD240CP

- Flat sliding lids
- Inner liner of stucco aluminium
- 4 dividers included (As standard)
- Heated glass frames
- Internal LED light
- LED illuminated display board
- Options: Customized decoration



Castors with and without brake



Moveable dividers

Technical specifications

Model	DD240CP
Climate Class	N
Temperature Range, °C	-14 to -22
Gross Volume, l	242
Net Volume, l	223
External Dimensions, WxDxH(with wheels)	1010x877x1245(1417)
Internal Dimensions, WxDxH	890x364x392/890x419x481
Doors	4 flat sliding glass
Shelves/Baskets	4
Outer Body	White/Grey
Interior	Stucco Aluminium
Castors/Feet	4
Lock	N
Voltage/Frequency, V/Hz	220-240/50
Input Power, W	450
Energy Consumption, kWh/24h	See www.tefcold.dk
Gross Weight, kg	105
Net Weight, kg	87
Noise Level dbA	45
Type of Cooling	Static
Type of Defrost	Manual
Controller	Mechanical
Thermometer	N
Refrigerant	R404a
Charge, g	230
Internal Light	LED
Canopy Light	LED

CHEST storage freezers

The chest freezers are available in five different sizes, all with stainless steel lid as option.
internal baskets are included in all models.

TEFCOLD



» Chest Freezers



- FR305**
- Handle with lock
 - Defrost water drain
 - Thermometer included
 - Inner liner of stucco aluminium
 - 4 castors included
 - 1 basket included



- FR205**
- Handle with lock
 - Defrost water drain
 - Thermometer included
 - Inner liner of stucco aluminium
 - 4 castors included
 - 1 basket included



- FR605**
- Handle with lock
 - Defrost water drain
 - Thermometer included
 - Inner liner of stucco aluminium
 - Internal light
 - 3 baskets included
 - 4 castors included

Technical specifications

Model	FR205	FR305	FR405	FR505	FR605
Climate Class	T	T	T	T	T
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	189	278	385	463	567
Net Volume, l	185	273	377	454	557
External Dimensions, WxDxH	734x700x945	984x700x945	1284x700x945	1504x700x945	1804x700x945
Internal Dimensions, WxDxH	610x480x725	860x480x725	1160x480x725	1380x480x725	1680x480x725
Doors	Solid lid	Solid lid	Solid lid	Solid lid	Solid lid
Shelves/Baskets	1 basket	1 basket	2 baskets	2 baskets	3 baskets
Outer Body	White	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 castors	4 castors	4 castors	4 castors	4 castors
Lock	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	100	120	150	150	220
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	43	50	59	66	73
Net Weight, kg	39,5	46,5	55	61	68
Noise Level dbA	42	42	42	42	42
Type of Cooling	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R600a	R600a	R600a	R600a	R600a
Charge, g	44	50	80	90	105
Internal Light	N	N	10 W	10 W	10 W

» Chest Freezers



- FR605S**
- Stainless steel lid
 - Handle with lock
 - Defrost water drain
 - Thermometer included
 - Inner liner of stucco aluminium
 - Internal light
 - 3 baskets included
 - 4 castors included



- FR405S**
- Stainless steel lid
 - Handle with lock
 - Defrost water drain
 - Thermometer included
 - Inner liner of stucco aluminium
 - 4 castors included
 - 2 baskets included



- FR505S**
- Stainless steel lid
 - Handle with lock
 - Defrost water drain
 - Thermometer included
 - Inner liner of stucco aluminium
 - 4 castors included
 - 2 baskets included

Technical specifications

Model	FR205S	FR305S	FR405S	FR505S	FR605S
Climate Class	T	T	T	T	T
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	189	278	385	463	567
Net Volume, l	185	273	377	454	557
External Dimensions, VxDxH	734x700x945	984x700x945	1284x700x945	1504x700x945	1804x700x945
Internal Dimensions, VxDxH	610x480x725	860x480x725	1160x480x725	1380x480x725	1680x480x725
Doors	Solid lid, SS	Solid lid, SS	Solid lid, SS	Solid lid, SS	Solid lid, SS
Shelves/Baskets	1 basket	1 basket	2 baskets	2 baskets	3 baskets
Outer Body	White, SS lid	White, SS lid	White, SS lid	White, SS lid	White, SS lid
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 castors	4 castors	4 castors	4 castors	4 castors
Lock	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	100	120	150	150	220
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	43	50	59	66	73
Net Weight, kg	40	47	55	61	68
Noise Level dbA	42	42	42	42	42
Type of Cooling	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R600a	R600a	R600a	R600a	R600a
Charge, g	44	50	80	90	105
Internal Light	N	N	N	N	N

» Chest Freezers



- CF700S**
- Stainless steel lid
 - Fast and high freezing capacity
 - Handle with lock
 - Internal light
 - 1 baskets included
 - Control panel with alarm
 - 4 castors, 2 with brake
 - Defrost water drain
 - Service free built-in condenser



- CF700**
- Fast and high freezing capacity
 - Handle with lock
 - Internal light
 - 1 basket included
 - Control panel with alarm
 - 4 castors, 2 with brake
 - Defrost water drain
 - Service free built-in condenser

Technical specifications

Model	CF700	CF700S
Climate Class	T	T
Temperature Range, °C	-14 to -24	-14 to -24
Gross Volume, l	675	675
Net Volume, l	646	646
External Dimensions, WxDxH	2060x716x830	2060x716x830
Internal Dimensions, WxDxH	1935x510x685	1935x510x685
Doors	Solid lid	Solid lid, SS
Shelves/Baskets	1 basket	1 basket
Outer Body	White	White
Interior	Stucco Aluminium	Stucco Aluminium
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50
Input Power, W	391	391
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	107	107
Net Weight, kg	101	101
Noise Level dbA	45	45
Type of Cooling	Static	Static
Type of Defrost	Manual	Manual
Controller	Mechanical	Mechanical
Thermometer	Y	Y
Refrigerant	R404a	R404a
Charge, g	290	290
Internal Light	10 W	10 W



UPRIGHT display freezers

The upright freezers UFSC/UFFS are available with solid door or glass door and with or without illuminated canopy. As the bottle coolers, these freezers are suitable for branding.

The smaller UF50/100G merchandising models with glass door can be placed on counters for a better display of products, and are also available with illuminated canopy.



Did you know?

We offer matching coolers for most of our upright freezers. For example, the UFSC/UFFS models match the popular FS/SCU coolers.

See our website or ask the sales team for more information.

» Upright Freezers



NF2500G

- LED illuminated canopy
- Ventilated cooling
- Interior LED light
- Digital temperature display
- 5 adjustable shelves
- Adjustable feet
- Automatic defrost
- Lock
- Self-closing door
- Option: Customized decoration



UFSC1450GCP

- Illuminated canopy
- Fan assisted cooling
- Interior light
- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration



NF5000G

- LED illuminated canopy
- Ventilated cooling
- Interior LED light
- Digital temperature display
- 10 adjustable shelves
- Adjustable feet
- Automatic defrost
- Lock
- 2 Self-closing doors
- Option: Customized decoration

Technical specifications

Model	NF2500G	NF5000G	UFFS1450GCP	UFSC1450GCP
Climate Class	N	N	N	N
Temperature Range, °C	-12 - -24	-12 - -24	-12 to -22	-12 to -22
Gross Volume, l	444	984	480	480
Net Volume, l	412	930	353	353
External Dimensions, WxDxH	680x720x1990	1370x720x1990	680x655x2090	680x655x2090
Internal Dimensions, WxDxH	560x580x1270	1250x580x1270	577x495x1684	577x495x1684
Doors	1 self closing glass	2 self closing glass	1 glass	1 glass
Shelves/Baskets	5 adjustable	10 adjustable	6	6
Outer Body	White	White	White	White
Interior	Coated steel	Coated steel	Aluminium	Aluminium
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	1000	1100	867	867
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	149	242	130	130
Net Weight, kg	138	227	117	117
Noise Level dbA	48	48	48	48
Type of Cooling	Ventilated	Ventilated	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Manual	Manual
Controller	Digital	Digital	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R404a	R404a	R404a	R404a
Charge, g	460	880	325	325
Internal Light	LED	LED	36 W Neon	36 W Neon
Canopy Light	LED	LED	18 W Neon	18 W Neon

» Upright Freezers



UFFS370GCP

- Illuminated canopy
- Fan assisted cooling
- Interior light
- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration



UFFS370G

- Fan assisted cooling
- Interior light
- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration



UFFS370SD

- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration

Technical specifications

Model	UFFS370G	UFFS370GCP	UFFS370SD
Climate Class	N	N	N
Temperature Range, °C	-13 to -23	-13 to -23	-14 to -24
Gross Volume, l	300	300	300
Net Volume, l	270	270	270
External Dimensions, WxDxH	595x640x1840	595x640x1980	595x640x1840
Internal Dimensions, WxDxH	470x440x1545	470x440x1545	470x440x1545
Doors	1 glass	1 glass	1 solid
Shelves/Baskets	6 fixed freezing	6 fixed freezing	6 fixed freezing
Outer Body	White	White	White
Interior	ABS	ABS	ABS
Castors/Feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	570	570	270
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	94	97	85,5
Net Weight, kg	86	89	80
Noise Level dbA	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Static
Type of Defrost	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y
Refrigerant	R404a	R404a	R404a
Charge, g	190	190	190
Internal Light	15 W Neon	15 W Neon	N
Canopy Light	N	15 W Neon	N

» Upright Freezers



UFSC370SD

- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration



UFSC370G

- Fan assisted cooling
- Interior light
- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration



UFSC370GCP

- Illuminated canopy
- Fan assisted cooling
- Interior light
- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration

Technical specifications

Model	UFSC370G	UFSC370GCP	UFSC370SD
Climate Class	N	N	N
Temperature Range, °C	-13 to -23	-13 to -23	-14 to -24
Gross Volume, l	300	300	300
Net Volume, l	270	270	270
External Dimensions, WxDxH	595x640x1840	595x640x1980	595x640x1840
Internal Dimensions, WxDxH	470x440x1545	470x440x1545	470x440x1545
Doors	1 glass	1 glass	1 solid
Shelves/Baskets	6 fixed freezing	6 fixed freezing	6 fixed freezing
Outer Body	White	White	White
Interior	ABS	ABS	ABS
Castors/Feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	570	570	270
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	94	97	85,5
Net Weight, kg	86	89	80
Noise Level dbA	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Static
Type of Defrost	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y
Refrigerant	R404a	R404a	R404a
Charge, g	190	190	190
Internal Light	15 W Neon	15 W Neon	N
Canopy Light	N	15 W Neon	N

» Upright Freezers



UF100G HEAT DOOR

- Interior LED light
- Self-closing heated door
- 3 Adjustable shelves
- Adjustable feet
- White interior
- Lock
- Replaceable door gasket



UF50GCP HEAT DOOR

- LED illuminated canopy
- Interior LED light
- Self-closing heated door
- 2 Adjustable shelves
- Adjustable feet
- White interior
- Lock
- Replaceable door gasket



UF100GCP HEAT DOOR

- LED illuminated canopy
- Interior LED light
- Self-closing heated door
- 3 Adjustable shelves
- Adjustable feet
- White interior
- Lock
- Replaceable door gasket

Technical specifications

Model	UF50G HEAT DOOR	UF50GCP HEAT DOOR	UF100G HEAT DOOR	UF100GCP HEAT DOOR
Climate Class	N	N	N	N
Temperature Range, °C	-12 - -24	-12 - -24	-12 - -24	-12 - -24
Gross Volume, l	50	50	90	116
Net Volume, l	48	48	88	113
External Dimensions, WxDxH	570x530x520	570x530x657	610x540x670	610x555x890
Internal Dimensions, WxDxH	450x420x380	450x420x380	500x430x540	500x430x540
Doors	1 self closing glass	1 self closing glass	1 self closing glass	1 self closing glass
Shelves/Baskets	2 coated	2 coated	3 coated	3 coated
Outer Body	White	White	White	White
Interior	White	White	White	White
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	154	154	230	230
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	39	46	49	59
Net Weight, kg	34	42	44	54
Noise Level dbA	45	45	45	45
Type of Cooling	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N	N
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	110	135	135	135
Internal Light	LED	LED	LED	LED
Canopy Light	N	LED	N	LED

» Upright Freezers



UF200S

- Stainless steel cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 3 Fixed shelves
- Adjustable feet at front, rollers at back
- Static cooling
- Digital thermometer
- Option: Wheels or adjustable legs



UF400

- White cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 7 Fixed freezing shelves
- Adjustable feet at front, rollers at back
- Static cooling
- Digital thermometer
- Option: Wheels or adjustable legs



UF400S

- Stainless steel cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 7 Fixed shelves
- Adjustable feet at front, rollers at back
- Static cooling
- Digital thermometer
- Option: Wheels or adjustable legs

Technical specifications

Model	UF200	UF200S	UF400	UF400S
Climate Class	N	N	N	N
Temperature Range, °C	-10 to -24	-10 to -24	-10 to -24	-10 to -24
Gross Volume, l	200	200	400	400
Net Volume, l	120	120	340	340
External Dimensions, WxDxH	600x600x850	600x600x850	600x600x1850	600x600x1850
Internal Dimensions, WxDxH				
Doors	1 solid White	1 solid SS430	1 solid White	1 solid SS430
Shelves/Baskets	3 fixed freezing	3 fixed freezing	7 fixed freezing	7 fixed freezing
Outer Body	White	SS430	White	SS430
Interior	ABS	ABS	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	150	150	210	210
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	50	50	79	79
Net Weight, kg	45	45	74	74
Noise Level dbA	40	40	40	40
Type of Cooling	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	75	75	185	185
Internal Light	N	N	N	N

» Upright Freezers



UF200V

- White cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 3 shelves
- Adjustable feet at front, rollers at back
- Ventilated cooling
- Digital thermometer
- Option: Wheels or adjustable legs



UF400V

- White cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- Adjustable feet at front, rollers at back
- Ventilated cooling
- Digital thermometer
- Option: Wheels or adjustable legs



UF400VS

- Stainless steel cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- Adjustable feet at front, rollers at back
- Ventilated cooling
- Digital thermometer
- Option: Wheels or adjustable legs

Technical specifications

Model	UF200V	UF200VS	UF400V	UF400VS
Climate Class	N	N	N	N
Temperature Range, °C	-10 to -24	-10 to -24	-10 to -24	-10 to -24
Gross Volume, l	200	200	400	400
Net Volume, l	120	120	340	340
External Dimensions, WxDxH	600x600x840	600x600x840	600x600x1850	600x600x1850
Internal Dimensions, WxDxH	510x485x610	510x485x610	510x485x1620	510x485x1620
Doors	1 solid White	1 solid SS430	1 solid White	1 solid SS430
Shelves/Baskets	3	3	4	4
Outer Body	White	SS430	White	SS430
Interior	ABS	ABS	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	150	150	250	250
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	50	50	79	79
Net Weight, kg	45	45	74	74
Noise Level dbA	40	40	40	40
Type of Cooling	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	150	150	300	300
Internal Light	N	N	N	N

» Upright Freezers



UF200SG

- Stainless steel cabinet
- White inner liner
- Lock fitted as standard
- 3 Fixed freezing shelves
- Adjustable feet at front, rollers at back
- Digital thermometer
- Option: Wheels or adjustable legs



UF400G

- White cabinet
- White inner liner
- Lock fitted as standard
- 7 fixed freezing shelves
- Adjustable feet at front, rollers at back
- Digital thermometer
- Option: Wheels or adjustable legs



UF400SG

- Stainless steel cabinet
- White inner liner
- Lock fitted as standard
- 7 fixed freezing shelves
- Adjustable feet at front, rollers at back
- Digital thermometer
- Option: Wheels or adjustable legs

Technical specifications

Model	UF200G	UF200SG	UF400G	UF400SG
Climate Class	N	N	N	N
Temperature Range, °C	-10 to -24	-10 to -24	-10 to -24	-10 to -24
Gross Volume, l	200	200	400	400
Net Volume, l	120	120	340	340
External Dimensions, WxDxH	600x600x850	600x600x850	600x600x1850	600x600x1850
Internal Dimensions, WxDxH	484x470x620	484x470x620	480x470x1605	480x470x1605
Doors	1 hinged glass	1 hinged glass	1 hinged glass	1 hinged glass
Shelves/Baskets	3 fixed freezing	3 fixed freezing	7 fixed freezing	7 fixed freezing
Outer Body	White	SS430	White	SS430
Interior	ABS	ABS	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	150	150	210	210
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	55	55	84	84
Net Weight, kg	49	49	79	79
Noise Level dbA	42	42	42	42
Type of Cooling	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R404a	R404a	R404a	R404a
Charge, g	75	75	185	185
Internal Light	LED	LED	LED	LED

» Upright Freezers



- UF200VG**
- White cabinet
 - White inner liner
 - Lock fitted as standard
 - 3 shelves
 - Ventilated cooling
 - Adjustable feet at front, rollers at back
 - Digital thermometer
 - Option: Wheels or adjustable legs



- UF400VG**
- White cabinet
 - White inner liner
 - Lock fitted as standard
 - 4 shelves
 - Ventilated cooling
 - Adjustable feet at front, rollers at back
 - Digital thermometer
 - Option: Wheels or adjustable legs



- UF400VSG**
- Stainless steel cabinet
 - White inner liner
 - Lock fitted as standard
 - 4 shelves
 - Ventilated cooling
 - Adjustable feet at front, rollers at back
 - Digital thermometer
 - Option: Wheels or adjustable legs

Technical specifications

Model	UF200VG	UF200VSG	UF400VG	UF400VSG
Climate Class	N	N	N	N
Temperature Range, °C	-10 to -24	-10 to -24	-10 to -24	-10 to -24
Gross Volume, l	200	200	400	400
Net Volume, l	120	120	340	340
External Dimensions, WxDxH	600x600x840	600x600x840	600x600x1850	600x600x1850
Internal Dimensions, WxDxH	484x470x610	484x470x610	480x470x1605	480x470x1605
Doors	1 hinged glass	1 hinged glass	1 hinged glass	1 hinged glass
Shelves/Baskets	3	3	4	4
Outer Body	White	SS430	White	SS430
Interior	ABS	ABS	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	150	150	250	250
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	55	55	84	84
Net Weight, kg	49	49	79	79
Noise Level dbA	42	42	42	42
Type of Cooling	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R404a	R404a	R404a	R404a
Charge, g	75	75	185	185
Internal Light	LED	LED	LED	LED

» Upright Freezers



UF550S

- Digital temperature display
- 6 fixed f-reezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration



UF600S

- Stainless steel extreior
- White inner liner
- Lock fitted as standard
- Reversible door
- 7 Fixed freezing shelves
- Static cooling
- Digital thermometer
- Option: Wheels or adjustable legs



UF700V

- White cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 3 adjustable shelves, 1 bottom shelf
- Ventilated cooling
- Digital thermometer
- 4 wheels

Technical specifications

Model	UF550	UF550S	UF600	UF600S	UF700V	UF700VS
Climate Class	N	N	N	N	N	N
Temperature Range, °C	-10 to -24	-10 to -24	-10 to -24	-10 to -24	-10 to -24	-10 to -24
Gross Volume, l	461	461	600	600	641	641
Net Volume, l	420	420	555	555	550	550
External Dimensions, WxDxH	777x720x1720	777x720x1720	770x750x1900	770x750x1900	777x730x1970	777x730x1970
Internal Dimensions, WxDxH	600x555x1469	600x555x1469	653x580x1680	653x580x1680	663x581x1660	663x581x1660
Doors	1 solid White	1 solid SS430	1 solid White	1 solid SS430	1 solid White	1 solid SS430
Shelves/Baskets	7 fixed freezing	7 fixed freezing	7 fixed freezing, GN2/1	7 fixed freezing, GN2/1	3 adjustable GN2/1	3 adjustable GN2/1
Outer Body	White	White	White	White	White	White
Interior	ABS	ABS	ABS	ABS	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	4 wheels	4 wheels
Lock	Y	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	350	350	350	350	540	540
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	92	92	101	101	122	122
Net Weight, kg	85	85	94	94	113	113
Noise Level dbA	45	45	45	45	45	45
Type of Cooling	Static	Static	Static	Static	Ventilated	Ventilated
Type of Defrost	Manual	Manual	Manual	Manual	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a	R404a	R404a
Charge, g	200	200	290	290	350	350
Internal Light	N	N	N	N	N	N